



Actuator LA28 Compact

Data sheet

LA28 Compact

The LA28 Compact is a small and powerful actuator designed for use in system solutions for healthcare equipment or industrial applications. Ideal applications are for example wheelchairs, treatment chairs, patient lifts or beds.

Some benefits of the LA28 compact are:

- Compact design and small installation dimensions
- Metal back fixture makes the actuator capable of withstanding high static pull force and ensures high safety
- Quiet operation
- 3500N in push (with strong motor) and 2000N in pull
- Options such as spline and safety nut to ensure safe operation at all times.



Features and options:

- 12V / 24V DC permanent magnet motor
- Thrust up to 3500 N (with strong motor)
- Stainless steel piston rod
- Elegant and compact design with small installation dimensions
- Colour: black
- Low noise level
- Available with extra powerful motor (strong motor), increases speed and strength
- Brake - increase self-locking ability for LA28C actuators with 4, 6, 9 or 12 mm pitch with or without strong motor
- Reed-switch (LA28C = 8 pulses/spindle rev. and LA28C with strong motor = 6 pulses/Spindle rev.)
- Splines function (the actuator can only push)
- Safety nut in push direction only
- 0.2 m and 0.4 m coiled cable
- Motor and terminal cover
- Metal back fixture
- Protection class IPX6

Usage:

- Duty cycle: Max 10 % or max. 2 min. continuous use followed by 18 min. not in use
- Ambient temperatures: +5° to +40°C
- Compatibility: CB8, CB12, CB14 and CBJ
- Approvals: IEC 60601-1, ANSI/AAMI ES60601-1 and CAN/CSA-22.2 No 60601-1

Technical specifications:

LA28 Compact with standard motor

Order number	Push Max. (N)	Pull Max. (N) Plastic / Alu	*Self-lock max. (N) Push	*Self-lock max. (N) Pull Plastic/Alu	Pitch (mm/spindle rev.)	Typical speed (mm/s) Load		Standard stroke lengths (mm) In steps of 50 mm	Typical amp.	
						no	full		12 V	24 V
286xxx-xxxxx0xx	2500	0/2000	2500	0/2000	2	4.2	3.0	100 – 400	-	1.5
285xxx-xxxxx0xx	2000	0/2000	2000	0/2000	2.5	5.3	4.0	100 – 400	-	1.6
281xxx-xxxxx0xx	2000	0/2000	2000	0/2000	3	7.0	4.8	100 – 400	-	1.5
284xxx-xxxxx0xx	1500	0/1500	1500	0/1500	4	9.5	6.7	100 – 400	-	1.6
284xxx-4xxxx0xx	1500	0/1500	1500	0/1500	4	9.5	6.7	100 – 400	-	1.6
282xxx-xxxxx0xx	1000	0/1000	500	0/500	6	14.3	9.6	100 – 400	-	1.5
282xxx-4xxxx0xx	1000	0/1000	1000	0/1000	6	12.7	9.6	100 – 400	-	1.5
283xxx-xxxxx0xx	800	0/800	200	0/200	9	21.1	14.5	100 – 600	-	1.5
283xxx-4xxxx0xx	800	0/800	800	0/800	9	20.9	10.7	100 – 600	-	2.4
287xxx-xxxxx0xx	800	0/800	0	0/0	12	25.8	17.1	100 – 600	-	1.9
287xxx-4xxxx0xx	800	0/800	300	0/300	12	24.8	15.1	100 – 600	-	1.9

LA28 Compact with "S" motor

Order number	Push Max. (N)	Pull Max. (N) Plastic / Alu	*Self-lock max. (N) Push	*Self-lock max. (N) Pull Plastic / Alu	Pitch (mm/spindle rev.)	Typical speed (mm/s) Load		Standard stroke lengths (mm) In steps of 50 mm	Typical amp.	
						no	full		12 V	24 V
286xxx-xxxxx1xx	3500	0/2000	3500	0/2000	2	6.7	4.7	100 – 400	-	3.9
285xxx-xxxxx1xx	3000	0/2000	3000	0/2000	2.5	8.6	6.1	100 – 400	-	3.6
281xxx-xxxxx1xx	2000	0/2000	2000	0/2000	3	10.8	8.4	100 – 400	-	2.9
284xxx-xxxxx1xx	2000	0/2000	1200	0/1200	4	14.6	10.3	100 – 400	-	3.6
284xxx-4xxxx1xx	2000	0/2000	2000	0/2000	4	14.3	10.3	100 – 400	-	3.4
282xxx-xxxxx1xx	2000	0/2000	500	0/500	6	22.0	13.8	100 – 400	-	4.1
282xxx-4xxxx1xx	2000	0/2000	2000	0/2000	6	22.0	12.7	100 – 400	-	4.6
283xxx-xxxxx1xx	1500	0/1500	500	0/500	9	34.2	16.5	100 – 600	-	4.9
283xxx-4xxxx1xx	1500	0/1500	1500	0/1500	9	33.0	10.9	100 – 600	-	5.5
287xxx-xxxxx1xx	800	0/800	0	0/0	12	46.0	33.5	100 – 600	-	3.1
287xxx-4xxxx1xx	800	0/800	800	0/800	12	45.9	33.5	100 – 600	-	3.1

LA28 Compact with 12V motor


Order number	Push Max. (N)	Pull Max. (N) Plastic / Alu	*Self-lock max. (N) Push	*Self-lock max. (N) Pull Plastic / Alu	Pitch (mm/spindle rev.)	Typical speed (mm/s) Load		Standard stroke lengths (mm) In steps of 50 mm	Typical amp.	
						No	Full		12 V	24 V
285xxx-xxxxx2xx	3000	0/2000	3000	0/2000	2.5	8.6	3.6	100 – 400	6.6	-
281xxx-xxxxx2xx	2000	0/2000	2000	0/2000	3	10.2	6.2	100 – 400	6.9	-
282xxx-xxxxx2xx	2000	0/2000	500	0/500	6	19.9	8.2	100 – 400	7.7	-
282xxx-4xxxx2xx	2000	0/2000	2000	0/2000	6	19.8	7.0	100 – 400	8.5	-
283xxx-xxxxx2xx	1500	0/1500	0	0/000	9	28.9	11.7	100 – 600	7.9	-
283xxx-4xxxx2xx	1500	0/1500	1500	0/1500	9	26.5	2.8	100 – 600	7.9	-
287xxx-xxxxx2xx	800	0/800	0	0/0	12	25.8	17.1	100 – 600	5.9	-
287xxx-4xxxx2xx	800	0/800	800	0/800	12	25.8	17.1	100 – 600	5.9	-

Above data: the measurements are made with the actuators connected to a stable power supply.

A reed-switch has no influence on above mentioned data.

LA28 Compact
Ordering example:

28 1 1 0 A - 1 0 250 0 3 0

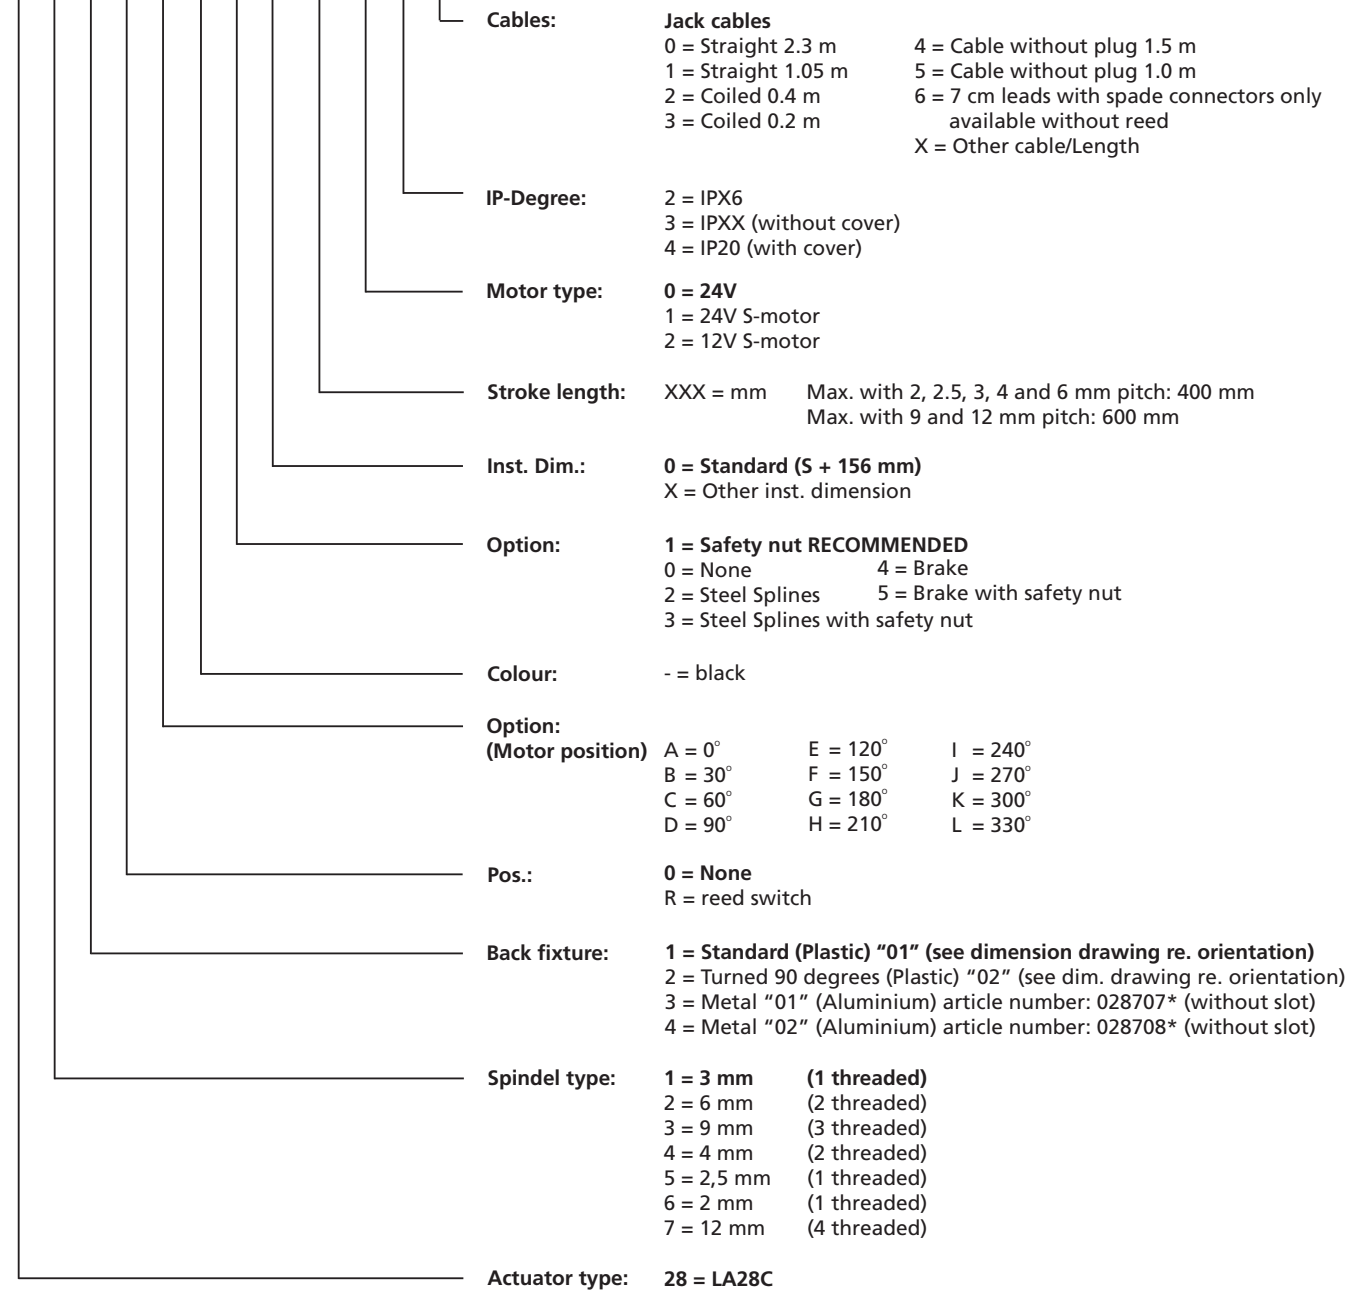

- Cables:**
 - Jack cables**
 - 0 = Straight 2.3 m
 - 1 = Straight 1.05 m
 - 2 = Coiled 0.4 m
 - 3 = Coiled 0.2 m
 - 4 = Cable without plug 1.5 m
 - 5 = Cable without plug 1.0 m
 - 6 = 7 cm leads with spade connectors only available without reed
 - X = Other cable/Length

- IP-Degree:**
 - 2 = IPX6
 - 3 = IPXX (without cover)
 - 4 = IP20 (with cover)

- Motor type:**
 - 0 = 24V**
 - 1 = 24V S-motor
 - 2 = 12V S-motor

- Stroke length:**
 - XXX = mm
 - Max. with 2, 2.5, 3, 4 and 6 mm pitch: 400 mm
 - Max. with 9 and 12 mm pitch: 600 mm

- Inst. Dim.:**
 - 0 = Standard (S + 156 mm)**
 - X = Other inst. dimension

- Option:**
 - 1 = Safety nut RECOMMENDED**
 - 0 = None
 - 2 = Steel Splines
 - 3 = Steel Splines with safety nut
 - 4 = Brake
 - 5 = Brake with safety nut

- Colour:**
 - = black

- Option: (Motor position)**
 - A = 0°
 - B = 30°
 - C = 60°
 - D = 90°
 - E = 120°
 - F = 150°
 - G = 180°
 - H = 210°
 - I = 240°
 - J = 270°
 - K = 300°
 - L = 330°



- Pos.:**
 - 0 = None**
 - R = reed switch

- Back fixture:**
 - 1 = Standard (Plastic) "01" (see dimension drawing re. orientation)**
 - 2 = Turned 90 degrees (Plastic) "02" (see dim. drawing re. orientation)
 - 3 = Metal "01" (Aluminium) article number: 028707* (without slot)
 - 4 = Metal "02" (Aluminium) article number: 028708* (without slot)


- Spindel type:**
 - 1 = 3 mm (1 threaded)**
 - 2 = 6 mm (2 threaded)
 - 3 = 9 mm (3 threaded)
 - 4 = 4 mm (2 threaded)
 - 5 = 2,5 mm (1 threaded)
 - 6 = 2 mm (1 threaded)
 - 7 = 12 mm (4 threaded)

- Actuator type:**
 - 28 = LA28C**

Dimensions:
LA28 Compact without cover.

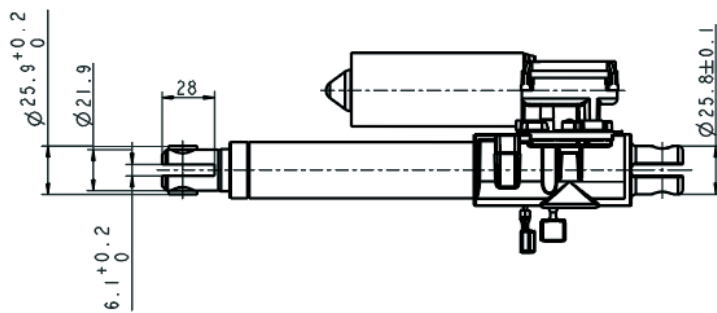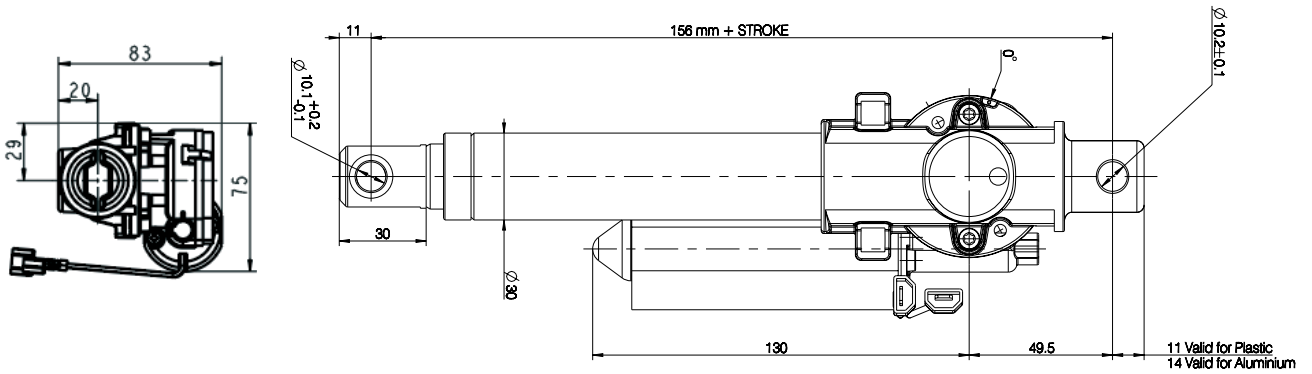


Drawing no.:028638

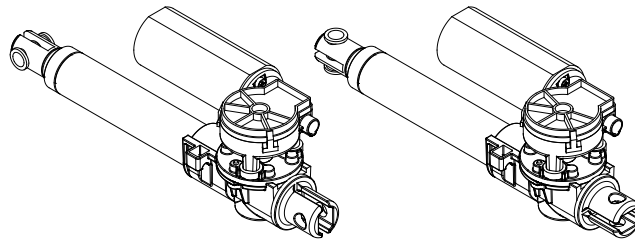


Back fixture 01

Back fixture 02



Drawing no.:028744

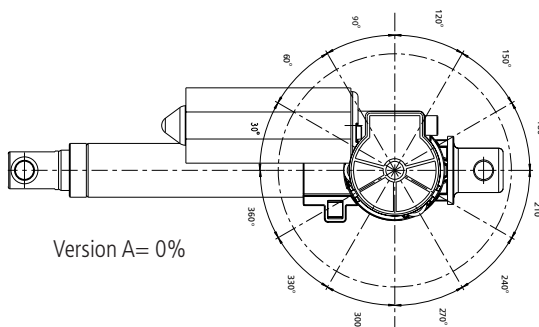


Drawing no. 028638

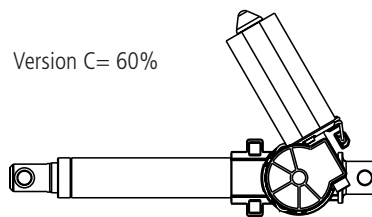

Drawing no. 028647

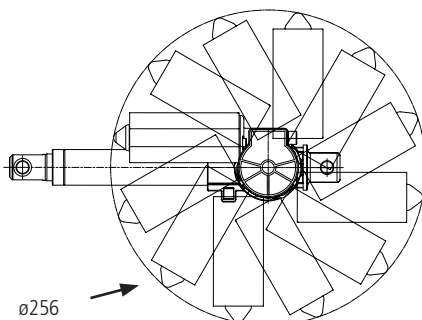


LA28 Compact with cover

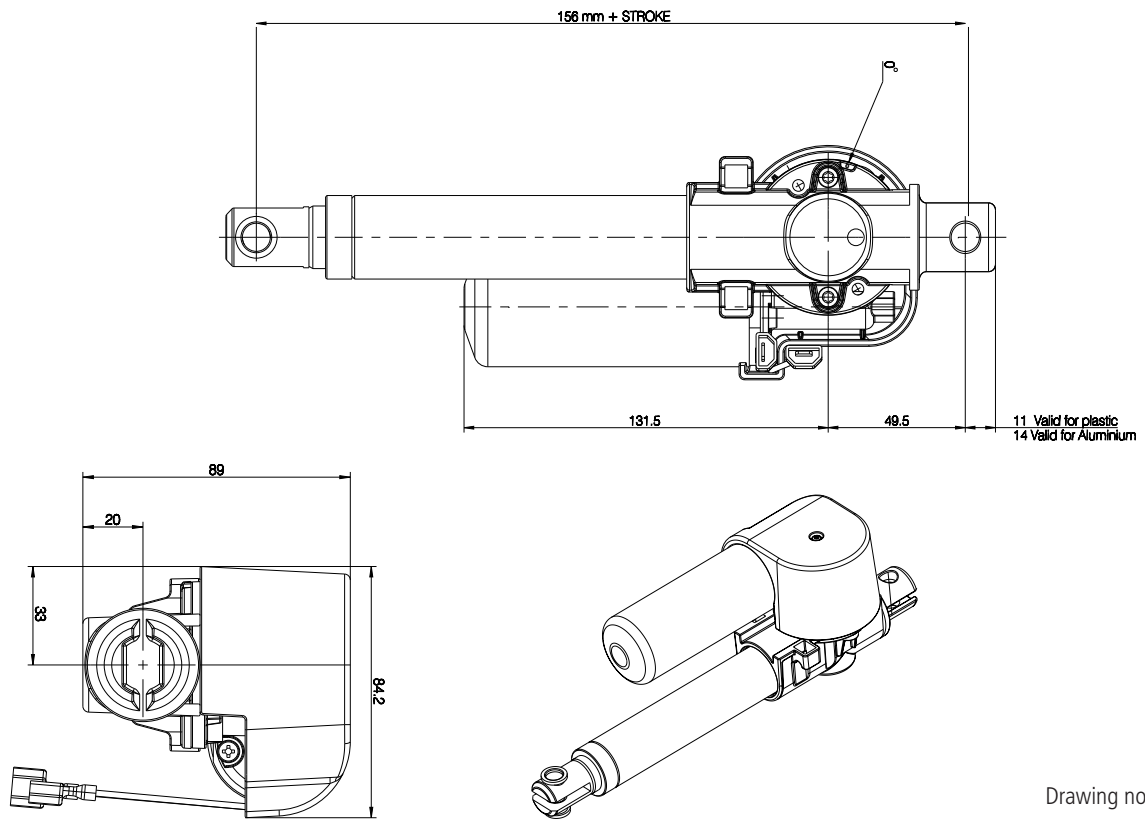

Drawing no. 028639

LA28 Compact with IPX6 housing

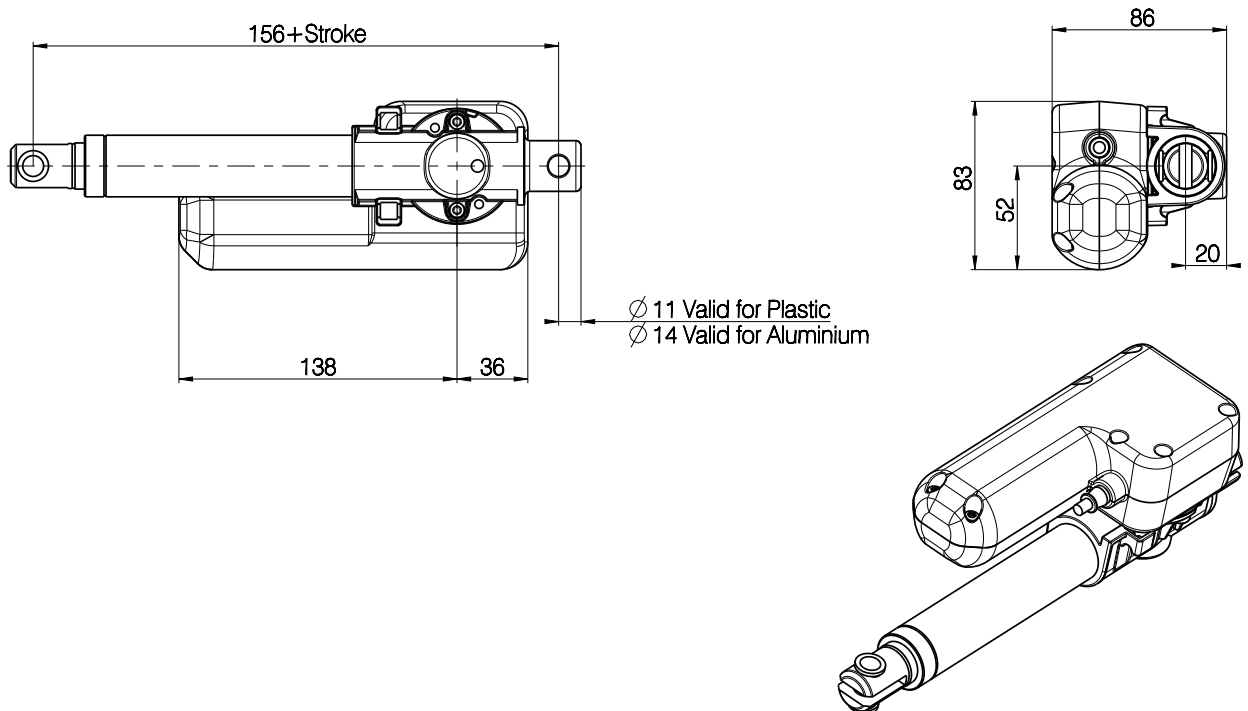

Drawing no. 028730

Installation dimensions:

S + 156: LA28 Compact (with or without safety nut), minimum inst. dim. 256 mm.

S + 167: LA28 Compact with splines, minimum inst. dim. 267 mm.

S + 181: LA28 Compact with safety nut and splines, minimum inst. dim. 281 mm.

S + 188: LA28 Compact with brake, minimum inst. dim. 288 mm.

Note:

The above data is with at stroke length of 100 mm.

In certain circumstances a stroke length of less than 100 mm is possible - please contact LINAK A/S.

Compatible control boxes:

	CB8	CB12	CB14	CBJ
LA28 with standard motor	X			X
LA28 with strong motor	X	X	X	X

Terms of use

The user is responsible for determining the suitability of LINAK products for specific application. LINAK takes great care in providing accurate and up-to-date information on its products.

However, due to continuous development in order to improve its products, LINAK products are subject to frequent modifications and changes without prior notice. Therefore, LINAK cannot guarantee the correct and actual status of said information on its products.

While LINAK uses its best efforts to fulfill orders, LINAK cannot, for the same reasons as mentioned above, guarantee the availability of any particular product. Therefore, LINAK reserves the right to discontinue the sale of any product displayed on its website or listed in its catalogues or other written material drawn up by LINAK.

All sales are subject to the Standard Terms of Sale and Delivery for LINAK. For a copy hereof, please contact LINAK.