


DR700™ RETROFIT

Overview


Lumen Rating 720lm
 Wattage 10.5W
 Beam Angle 60° WFL
 Light Type High-Brightness LED Directional Light




Product Dimensions




FRONT VIEW

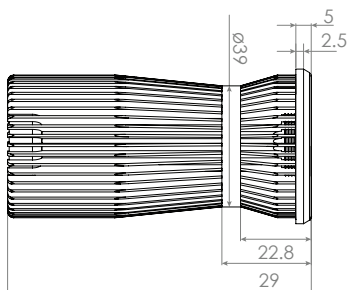

SIDE VIEW

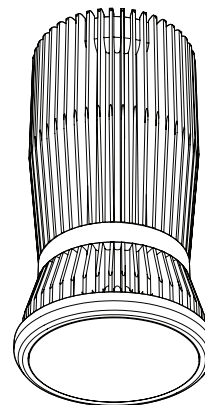


Product Life

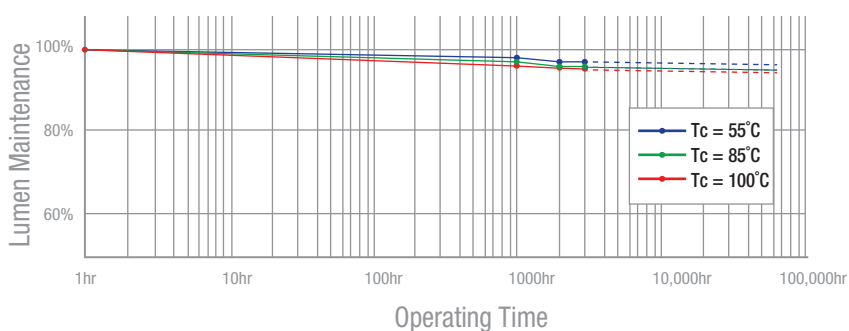


Photometrics

DR700 60°
POLAR CANDELA DISTRIBUTION
(720lm 3000K)

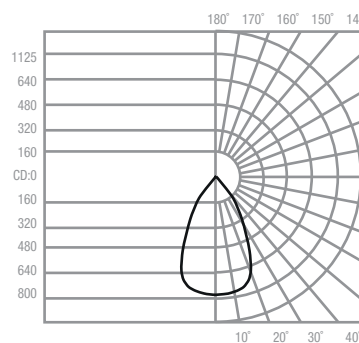

Product Installation

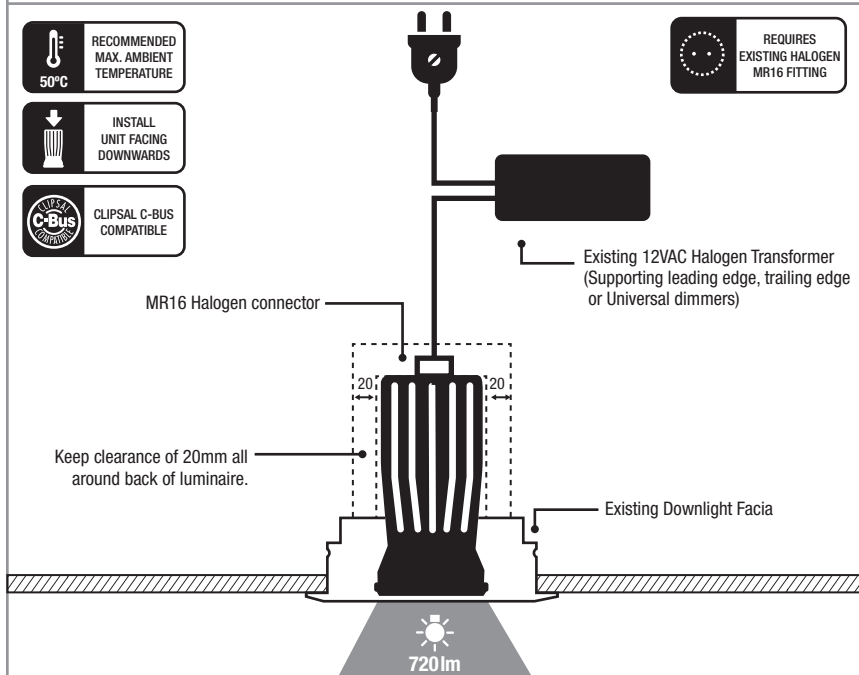

Specifications

Physical		Electrical	
Fascia	Halogen Fitting	Total Power	10.5W
Casing Colour	Black	Input Voltage	12VAC
Weight	165g	Dimming Range	0-100%
Install Clearance	20mm	Power Factor	up to 0.95
Warranty	3 years	IP Rating	IP30
STC Rating	42	Surge Protection	3100V
Luminaire Class	IEC 62560		
Material	Pure Aluminium/ UV Stabilized PMMA		
Operational		Compatibility	
Total Lumen Output	720lm*	Standard Electronic and	
Light Quality	CRI 83+	Magnetic 12V Transformers	
Efficacy	69lm/W	Leading Edge Dimmers	
Beam Angle	60°	Trailing Edge Dimmers	
Color Temp.	3000K	Universal Dimmers	
Operating Temp.	-30°C to 100°C		
Average Temp.	54°C (@Ta25)	Fits Any Standard Halogen Fitting	
Ambient Temp.	-28°C to 70°C		
Lifetime	70000h (@Ta35)		